


ENGLISH



V6000 - V7000

Weight and dimension	V6000	V7000
Weight (kg)		
Breaker operating weight	6 909	7 754
Breaker weight	5 354	5 929
Power cell	2 943	2 943
Dimension (mm)		
A	3 043	3 043
B	700	700
C	710	800
D	620	630
E	125	125

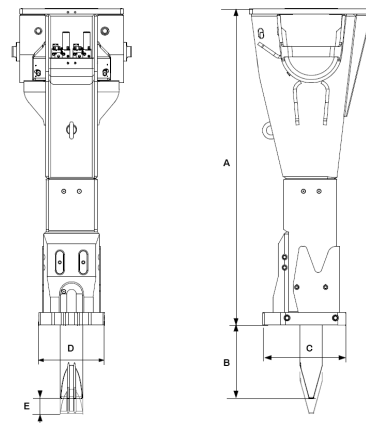

Operational information	V6000	V7000
Carrier weight range (min - max, t)	55 - 90	70 - 120
Oil flow range (min - max, l/min)	400 - 500	400 - 500
Operating pressure (max, bar)	165	165
Back pressure (max, bar)	10	10
In put power (kW)	138	138
Frequency (bpm)	290 - 420	290 - 420
Sound level / 10 m (dBA)	123	123
Automatic greasing	Standard	Standard
Bucket cylinder valve	Standard	Standard
Pressurization	Pre equipped	Pre equipped

Lubrication	V6000	V7000
Greasing station	86801511	86801511
Grease (20kg)	86383338	86383338
Oil (24kg)	86772977	86772977
Lubricating pump (x2)	86759289	86759289
Cartridges (x20)	86784758	86784758

Option (CPN)	V6000	V7000
Pressurization kit	86372505	86372505
Adaption plate	Depending on carrier	

Spare parts (CPN)	V6000 & V7000
Upper bushing	86788692
Lower bushing	86788700
Retaining pin (810d)	86759826
Retainers (830)	86759768
Seals kit	86798303
Maintenance kit level 0	86798311
Maintenance kit level 1	86798329

Tools							
Length (mm)	1 845	2 025	1 845	2 025	1 845	21 845	2 025
Weight (kg)	483,3	534,3	482,5	533	512	463,4	535,3
Ø (mm)	214	214	214	214	214	214	214
CPN	86759842	86799855	86792520	86804804	86792538	86792553	86799863

Product designs, specifications and/or data in this document are provided for informational purposes only and are not warranties of any kind. Product designs and/or specifications may be changed at any time without notice. The only warranties that apply to sales of products and services are standard written warranties, which will be furnished upon request.

Komatsu, Joy, Montabert, P&H and other trademarks and service marks used herein are the property of Komatsu Ltd., Komatsu Mining Corp., or their respective owners or licensees.

© 2017 Komatsu Mining Corp. All rights reserved.

EN-V6000&V7000-DIST-0418-V1

